



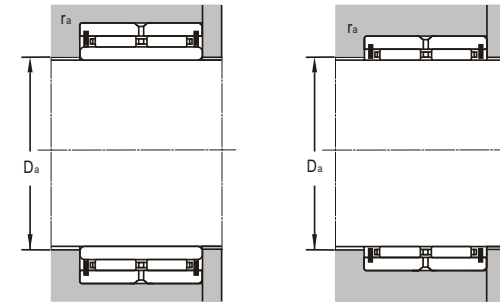

Needle Roller Bearings

double-row  
with spring lock ring on outer ring

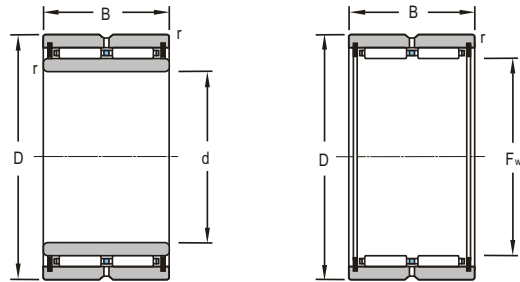

d 25~80mm

Boundary Dimensions					Basic Load Ratings		Limiting Speeds	
d	F <sub>w</sub>	D	B	r	Dynamic C	Static C <sub>0</sub>	Grease	Oil
mm					kN		r/min	
25		42	30	0.3	41.5	63	8500	13000
30		47	30	0.3	44	71.5	7500	11000
35		55	36	0.6	57.5	106	6100	9500
40		62	40	0.6	72	137	5600	8000
45		68	40	0.6	76	149	5300	7500
80		110	54	1	149	325	3200	4500
	20	32	30	0.3	17.6	12.8	13000	20000
	22	30	30	0.3	18.6	28.8	12000	18000
	25	37	30	0.3	36.5	50.5	11000	16000
	32	45	30	0.5	43	67	8500	13000
	35	47	30	0.3	44	71.5	7500	11000
	42	55	36	0.6	57.5	106	6500	9500
	52	68	40	0.6	76	149	5000	7500

Bearing Designations		Mass
Present	Original	
		kg
NA6905A	6534905	0.167
NA6906A	6534906	0.202
NA6907A	6534907	0.329
NA6908A	6534908	0.488
NA6909A	6534909	0.544
NA6916A	6534916	1.67
RNA602A	6634102	0.0938
RNA6903X2A	634704	0.059
RNA6904A	6634904	0.108
RNA69/28A	634906	0.138
RAN6906A	6634906	0.143
RNA6907A	6634907	0.211
RNA6909A	6634909	0.38